
Submittal Sheet

Bracket – ZBR8L

Slotted Shelf Bracket (Left Hand)

Standard finish is Electro-Galvanized (EG).

Uniform load rating 250 lbs. (1.11 kN) when mounted on 12 gauge channel.

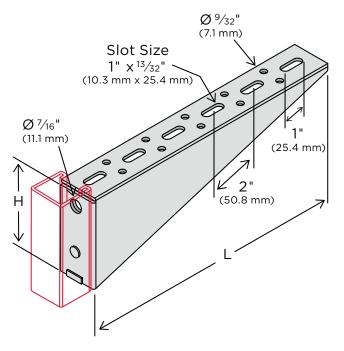

CATALOG NUMBER	WEIGHT	L		Н	
	lbs.	in.	mm	in.	mm
ZBR8L0600EG	0.58	6	152.4	2 1/8	73.0
ZBR8L0800EG	0.83	8	203.2	2 1/8	73.0
ZBR8L1000EG	1.14	10	254.0	2 1/8	73.0
ZBR8L1200EG	1.49	12	304.8	3 1/16	87.3
ZBR8L1400EG	1.74	14	355.6	3 15/16	100.0
ZBR8L1600EG	2.25	16	406.4	4 1/16	112.7
ZBR8L1800EG	2.55	18	457.2	4 15/16	125.4

Material is 1%" (41.3 mm) wide x ¼" (6.3 mm) thick unless specified. Holes are %6" (14.3 mm) diameter, 1%6" (20.6 mm) center to edge on 1%" (47.6 mm) centers unless specified.

Material Specifications and Finishes

Carbon Steel – ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

EG — Electro-Galvanized. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts. Recommended for relatively dry indoor use. This is the standard coating for most ZI-Strut products. Thickness of applied zinc is between 0.2 mils and 0.5 mils (5.1 μm to 12.7 μm). Coatings on ZI-Strut EG products meet ASTM B633 SC1 Type III. Note: Specifications subject to change without notice.

SUBMITTAL INFORMATION

PROJECT:	CONTRACTOR:	DATE:
ENGINEER:	SPECIFICATION REFERENCE:	SYSTEM TYPE:
	COMMENTS:	ZI-112823
 1600 Ritchie Court Rochelle, IL 61068 P 800.257.8182 	info@wheatland.com wheatland.com info@westerntube.com westerntube.com	WHEATLAND TUBE WESTERN TUBE