


Rooftop Support Blocks — ZRSB

Support With Metal Channel

Standard finish is Pre-Galvanized Zinc (PG).

The ZRSB Series provides a longer mounting surface with strut lengths up to 47.5".

Custom lengths are available upon request.

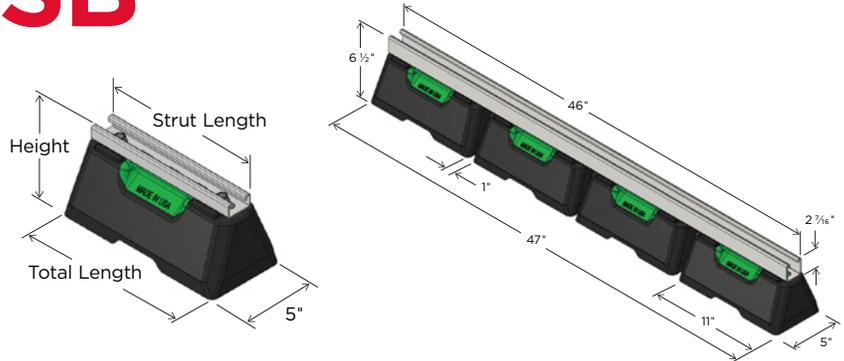

CATALOG NUMBER	NUMBER OF BASES	HEIGHT in.	STRUT LENGTH in.	TOTAL LENGTH in.	WEIGHT lbs.	UNIFORM LOAD CAPACITY* lbs.	kN
ZRSB SUPPORT WITH 1 3/16" PRE-GALV. 14 GAUGE STEEL CHANNEL							
ZRSB1081PG	1	4 13/16	10	11	4.8	1000	4.4
ZRSB22481PG	2		24	25	9.7	2000	8.8
ZRSB33681PG	3		36	37	14.6	3000	13.3
ZRSB44881PG	4		48	49	19.5	4000	17.8
ZRSB SUPPORT WITH 1 5/8" PRE-GALV. 12 GAUGE STEEL CHANNEL							
ZRSB1016PG	1	5 5/8	10	11	5.5	1000	4.4
ZRSB22416PG	2		24	25	11.4	2000	8.8
ZRSB33616PG	3		36	37	17.2	3000	13.3
ZRSB44816PG	4		48	49	23.0	4000	17.8
ZRSB SUPPORT WITH 2 7/16" PRE-GALV. 12 GAUGE STEEL CHANNEL							
ZRSB1024PG	1	6 7/16	10	11	6.0	1000	4.4
ZRSB22424PG	2		24	25	12.4	2000	8.8
ZRSB33624PG	3		36	37	18.8	3000	13.3
ZRSB44824PG	4		48	49	25.2	4000	17.8

* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.

Material Specifications and Finishes

Carbon Steel — ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

PG — ASTM A653 G-90 Pre-Galvanized Zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills. The coils or sheets are slit to size and fabricated by forming, shearing or punching to produce the finished product. During fabrication cut edges are not generally zinc coated; however, the zinc near the uncoated metal becomes a sacrificial anode to protect the bare areas.

Note: Specifications subject to change without notice.

SUBMITTAL INFORMATION

PROJECT: _____ CONTRACTOR: _____ DATE: _____

ENGINEER: _____ SPECIFICATION REFERENCE: _____ SYSTEM TYPE: _____

LOCATIONS: _____ COMMENTS: _____

ZI-120523