




Rooftop Support Blocks — ZRSBM

Support With Metal Channel

Standard finish is Pre-Galvanized Zinc (PG).

The ZRSBM Series provides a long mounting surface with strut lengths up to 18".

Custom lengths are available upon request.

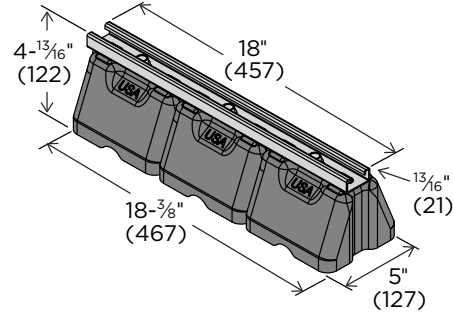

CATALOG NUMBER	NUMBER OF BASES	HEIGHT	STRUT LENGTH	TOTAL LENGTH	WEIGHT	UNIFORM LOAD CAPACITY*	
		in.	in.	in.	lbs.	lbs.	kN
ZRSB SUPPORT WITH 1 3/16" PRE-GALV. 14 GAUGE STEEL CHANNEL							
ZRSB0681PG	1	4 13/16	6	6.375	2.96	400	1.78
ZRSB1281PG	2		12	12.375	5.76	800	3.56
ZRSB1881PG	3		18	18.375	8.64	1200	5.34
ZRSB SUPPORT WITH 1 5/8" PRE-GALV. 12 GAUGE STEEL CHANNEL							
ZRSB0616PG	1	5 5/8	6	6.375	3.4	400	1.78
ZRSB21216PG	2		12	12.375	6.64	800	3.56
ZRSB31816PG	3		18	18.375	9.96	1200	5.34

* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.

Material Specifications and Finishes

Carbon Steel — ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

Note: Specifications subject to change without notice.

PG — ASTM A653 G-90 Pre-Galvanized Zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills. The coils or sheets are slit to size and fabricated by forming, shearing or punching to produce the finished product. During fabrication cut edges are not generally zinc coated; however, the zinc near the uncoated metal becomes a sacrificial anode to protect the bare areas.

SUBMITTAL INFORMATION

PROJECT: _____ CONTRACTOR: _____ DATE: _____

ENGINEER: _____ SPECIFICATION REFERENCE: _____ SYSTEM TYPE: _____

LOCATIONS: _____ COMMENTS: _____

ZI-060426